

MV-CA016-10UM/UC

1.6 MP, 1/2.9" CMOS, USB3.0 Camera



GEN*i*CAM

US3™
VISION


Introduction

MV-CA016-10UM/UC adopts IMX273 CMOS sensor and provides high quality image. The USB3.0 interface provides high-speed real-time transmission of uncompressed data with the maximum frame rate reaching 165.9 fps at full resolution.

Key Feature

- Supports auto and manual adjustment for exposure control, LUT, Gamma correction, and etc.
- Supports hardware triggering and software triggering
- Compatible with USB3 Vision Protocol and third-party software meeting with the protocol and standard
- Power supply and data transmission via USB3.0 interface

Dimension

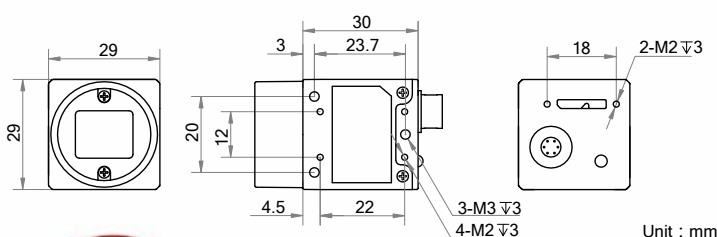

Available Model


Mono camera: MV-CA016-10UM

Color camera: MV-CA016-10UC

Applicable Industry

Electronic semiconductor, factory automation, liquor and beverage, and medicine packing.

Sensor Quantum Efficiency

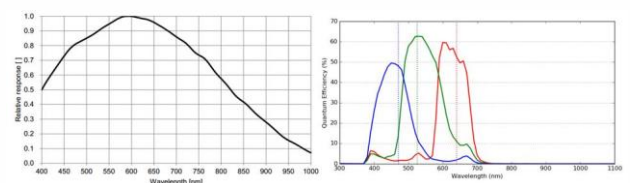

MV-CA016-10UM/UC



Specification

Model	MV-CA016-10UM	MV-CA016-10UC
Camera		
Sensor type	CMOS, global shutter	
Sensor model	IMX273	
Pixel size	3.45 μm × 3.45 μm	
Sensor size	1/2.9"	
Resolution	1440 × 1080	
Max. frame rate	165.9 fps @1440 × 1080	
Dynamic range	71 dB	
SNR	40 dB	
Gain	0 dB to 17 dB	
Exposure time	16 μs to 10 s	
Shutter mode	Off/Once/Continuous exposure mode	
Reverse image	Supports horizontal and vertical reverse image output	
Image buffer	128 MB	
Pixel format	Mono 8/10/10p/12/12p	Mono 8/10/12, Bayer RG 8/10/10p/12/12p, YUV422_YUYV_Packed, YUV 422 Packed, RGB8
Electrical features		
Data interface	USB 3.0, compatible with USB 2.0	
Digital I/O	Opto-isolated input x 1, Opto-isolated output x 1, Bi-directional non-isolated I/O x 1	
Power supply	5 VDC to 15 VDC, supports USB 3.0 power supply	
Power consumption	< 3 W @5 VDC	
Structure		
Lens mount	C-Mount	
Dimension	29 mm × 29 mm × 30 mm (1.14" × 1.14" × 1.18")	
Weight	< 56 g (0.12 lb.)	
Ingress protection	IP30 (under correct lens installation and wiring)	
Temperature	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)	
Humidity	20% to 80% RH, without condensation	
General		
Client software	MVS or third-party software compatible with USB3 Vision Protocol	
Operation system	32/64-bit Windows XP/7/10, 32/64-bit Linux and 64-bit MacOS	
Compatibility	USB3 Vision	
Certifications	CE, FCC, RoHS, KC	

HIKROBOT

Hangzhou Hikrobot Technology Co., Ltd.
No.399 Danfeng Road, Binjiang District, Hangzhou 310051, China.
en.hikrobotics.com

Copyright Hikrobot

Hangzhou Hikrobot Technology Co., Ltd. All Rights Reserved. Hangzhou Hikrobot Technology does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.